HANNspree

HO 325 PTB 32" Open Frame Touch Monitor

Experts in **Display**

Open Frame Touch Monitor HO 325 PTB

31.5" / 80cm Diagonal LED Backlight – Format 16:9

- 1920 x 1080 Full HD 1080P Resolution
- 10-Point Touch P-Cap Technology
- 178° / 178° Ultra Wide Viewing Angle
- 400 cd/m² High Brightness Panel
- Video Input: HDMI + Display Port
- IP55 (front) Rating Level
- Display Protection: Thickness 3mm
- Built-in Speakers
- ≥7H Toughened Hard Panel Surface
- Slim Profile, Edge-to-Edge True Flat Surface
- Metal chassis, frame and back cover
- VESA Mount and Multiple Mounting Options
- Orientation: Landscape, Portrait, Face-Up









31.5" / 80 cm

Part. No..: HO 325 PTB

SIZE, RESOLUTION



32"

16:9 Aspect Ratio



Full HD 1920 x 1080

CONNECTIVITY, IP LEVEL



HDMI DP



IP 55 Water & Dust Protection

VIEWING ANGLE, TOUCH



178 Ultra-Wide Viewing Angle



10 Point Touch

OTHER FEATURES



Low Power Consumption



30.000 Hours Lifetime

Display Solutions

Technical Specifications >>>



HO 325 PTB 32" Open Frame Touch Monitor

Experts in **Display**

Display Size	80 cm / 31.5" Diagonal
Panel Type	TFT – LED Backlight
Aspect Ratio	16:9
Resolution (H x V)	1920 x 1080 Full HD
Brightness (Typ.)	400cd/m² Panel / 340 cd/m² Monitor
Contrast (Typ.)	1.200:1 (Typical) / 10.000.000:1 (Active)
Display Area	698,4 x 392,85 mm
Viewing Angle L/R; U/D	178° H / 178° V (CR > 10)
Response Time	8 msec
Pixel Pitch	0,364 (H) x 0,364 (V) mm
Touch Type	Projected Capacitive Type – 10 Point Touch Material Glass + Glass (OGS+CG).
Display Colors	16.7M Colors
Horizontal Frequency	31 ~ 83 kHz
Vertical Frequency	56 ~ 75 Hz
Max Display Frequency	1920 x 1080 @ 60Hz
Input 1	HDMI
Input 2	Display Port
Input 3	USB Type B (Touch)
Speakers	Yes, 2W x 2, Earphone output
Power Consumption	On: 45W; Stand-by: ≤0.5W; Off: ≤0.3W (TBC)
AC Power Range	AC 100 ~ 240 Volt; 50 ~ 60 Hz
Product Dimensions	747 x 64.3 x 451.4 mm (W x D x H)
Packing Dimensions	863 x 163 x 577 mm (W x D x H)
Net / Gross Weight	14,5 Kg / 16,8 Kg

VESA Mounting	100 x 100 mm
Display Protection	Thickness 3±0.3 mm
Hardness / Transmittance	≥7H Toughened hard panel surface / ≥86%
IP Rating Level	IP 55 on surface (Front), Dust and Water Protection *
Controls	Menu, Up, Down, Bri (+), Vol (-), Input/Return, Power
LED Backlight life	30.000 hours
Accessory	EU and UK Power cables; HDMI Cable (1.5m); USB Cable for Touch (1,8m); Quick Start Guide, Warranty Card
Certifications	CE, RoHS, EU Energy Label
On Screen Display	15 Languages
Color	Warm, Nature, Cool, User's Mode
Preset Mode	PC, Movie, Game, ECO Modes
Housing	Material: Sheet Metal, Color: Black
Orientation	Landscape, Portrait, Face-Up

PART. NO.: HO 325 PTB




^{© 2020} HANNSpree, Inc. Specifications and design as well as accessories are subject to change without notice. Screen shots are simulated. Actual products may differ slightly from those illustrated on this promotion material. Please refer to actual samples for final selection. The products displayed on this promotion material may not be available for purchase in your particular country or locality. Please check with your local HANNspree authorized representatives for the availability of specific products in your area. All brand, product, Service names and logos are trademarks and/or registered trademarks of their respective manufactures and Companies.

^{*} IP55: The IP Code classifies how resistant a device is to foreign objects and moisture.

IP55 means that the monitor is protected from dust and can operate in dusty conditions. It is also protected against water jets projected by a nozzle (6.3mm) from any direction.

HO 325 PTB 32" Open Frame Touch Monitor

Experts in **Display**

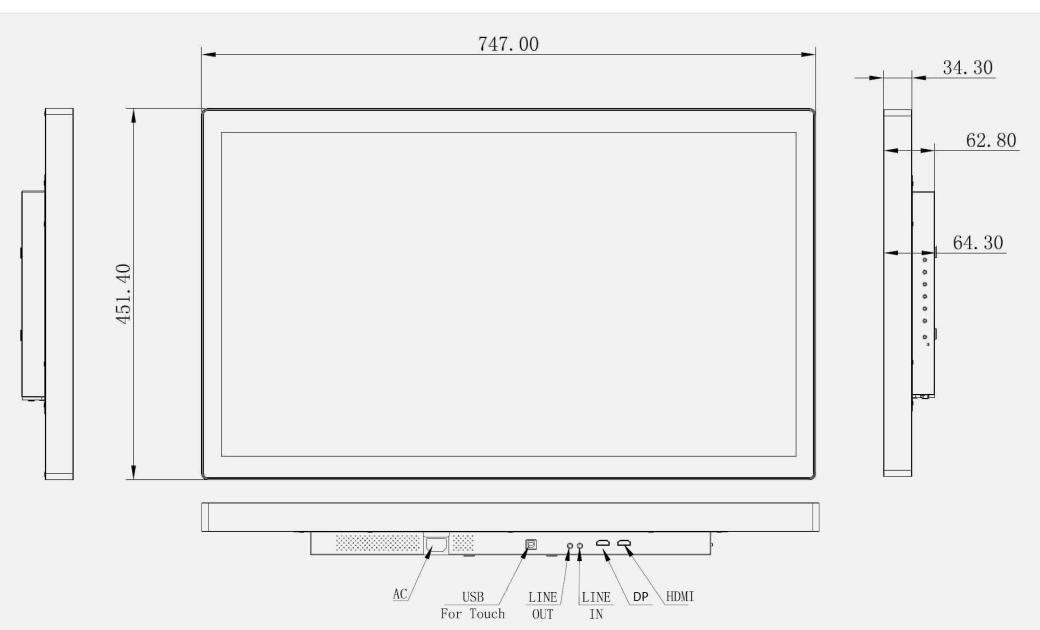

HO 325 PTB 32" Open Frame Touch Monitor

