



## USB 2.0 ACTIVE EXTENSION CABLE

133310/133311

The equip<sup>®</sup> USB 2.0 Active Extension Cable is built with active component and thus allows you to extend the USB connections with additional 10m / 15m. Plug-and-play, simply connect the extension cable with existing installation and build up a sustainable high speed USB deployment.

### Specifications

<b>Connector</b>	1 x USB A Type Male
	1 x USB A Type Female
<b>Power</b>	USB Bus-powered
<b>Physical Properties</b>	Color: Black
	Material: PVC
	Weight: 133310 (357g) 133311 (457g)
	Cable Length: 133310: 10m 133311: 15m

### Key Features

- Compliant with USB 2.0 specification
- Over current detection and protection
- Hot swappable, no driver required
- Fully shielded for error-free connections
- USB bus powered

### Ordering Information


PN	EAN	Package Size
133310	4015867460061	29 x 14.1 x 5.6cm
133311	4015867459980	36 x 14 x 5.6cm

### Package Contents

- 1 x USB 2.0 Extension Cable


RoHS compliant

REV	MODIFICATION	DATE
A	ISSUE	09/27/2020

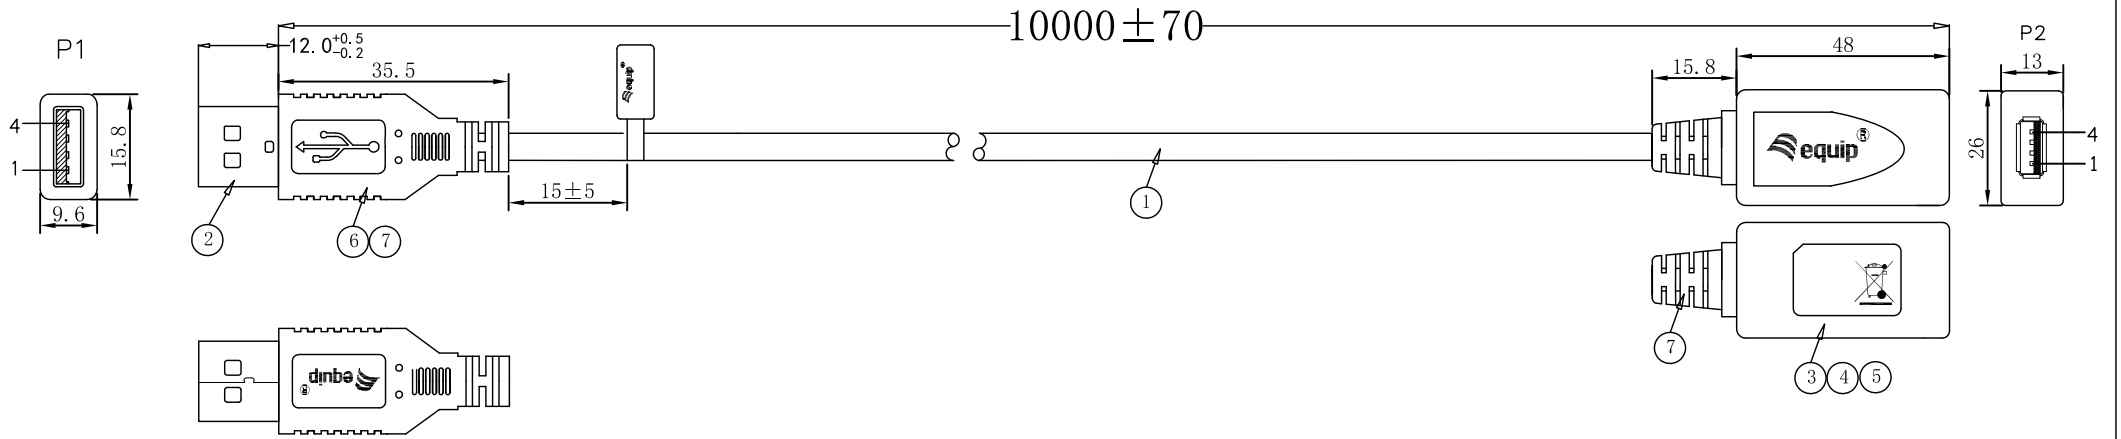


ELECTRONIC TEST:

- A.OPEN/SHORT/INTERMITTENCE: 100%.
- B.HI-POT: AC 300V 0.01S 1mA
- C.INSULATION RESISTANCE:DC300V 10MΩ(MIN)
- D.CONDUCTIVE RESISTANCE:10 OHM (MAX)

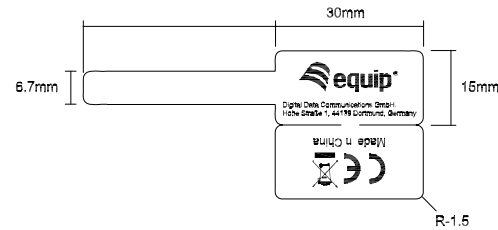

PIN OUT

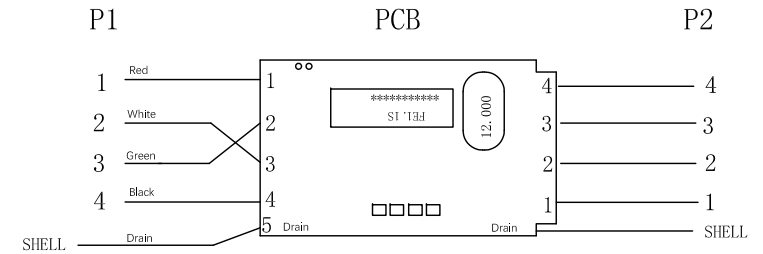


7	MOLDED	45P BLACK PVC	16	G				
6	MOLDED	LDPE	3	G				
5	SHELL	Black ABS Shell	2	PCS	PROJ:	TOLERANCE: XX= XXX=	PRODUCT NAME: USB Active extension cable	
4	PCB	PCB, FE1.1S	2	PCS	SCALE: NONE	REV: A	PART NO: 133310V3	
3	CONNECTOR	USB A Female : PIN G/F, Shell Nickel plated	1	PCS	UNIT: MM	SHEET: 1/1	CUST:	
2	CONNECTOR	USB A Male : PIN G/F, Shell Nickel plated	1	PCS	CUST APPROVED:			
1	CABLE	UL2725 28#(7/0.127TC)*1PR+24#(7/0.2TC) *2C+AL+D(1/0.254BC)+B (64/0.12LMS) Black PVC OD=4.8mm	10000	MM	APPROVED:			
					CHECKED:			
NO	NAME	SPECIFICATIONS	Q'TY	UNIT	DRAWING: Cesar 09/27/2020			





RoHS compliant

REV	MODIFICATION	DATE
A	ISSUE	09/27/2020

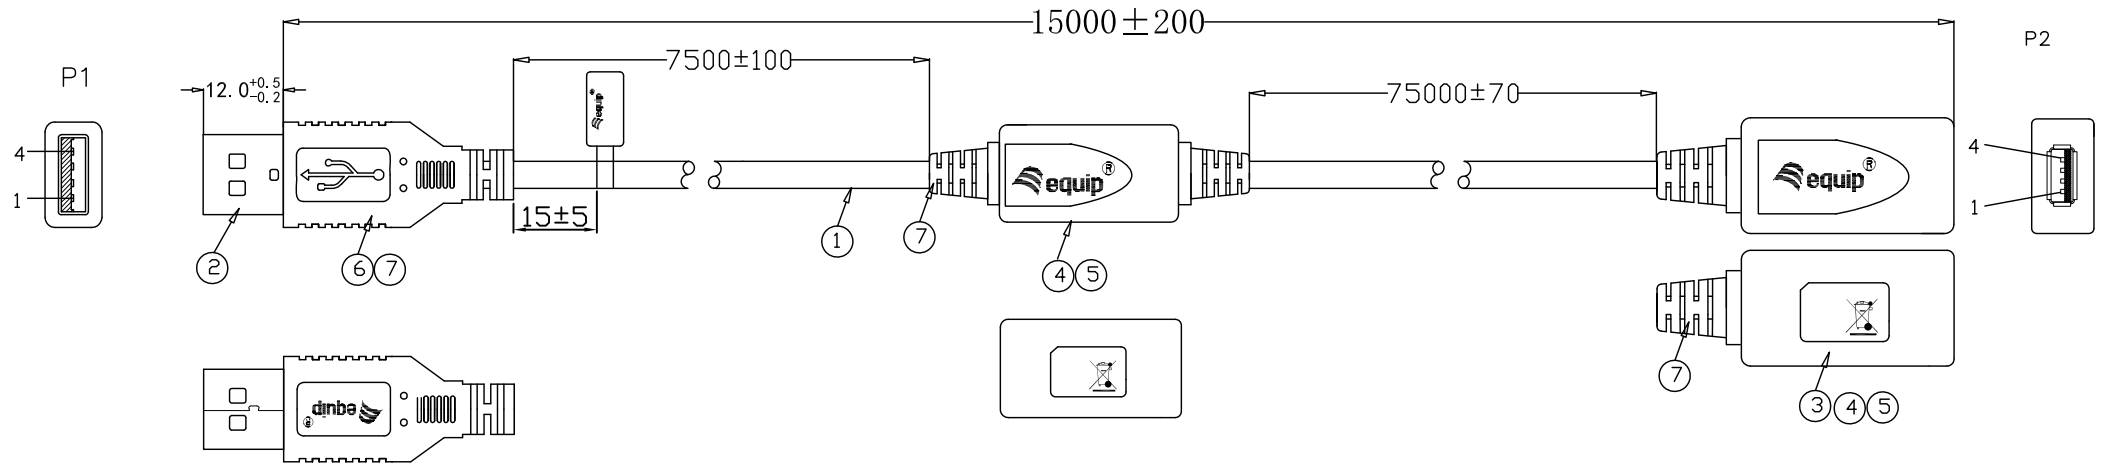

ELECTRONIC TEST:

- A.OPEN/SHORT/INTERMITTENCE: 100%.
- B.HI-POT: AC 300V 0.01S 1mA
- C.INSULATION RESISTANCE:DC300V 10MΩ(MIN)
- D.CONDUCTIVE RESISTANCE:10 OHM (MAX)

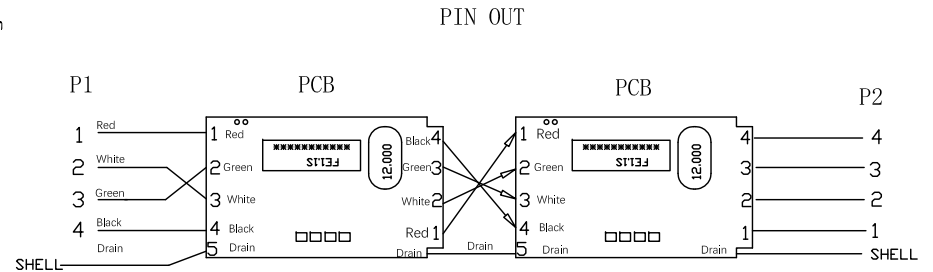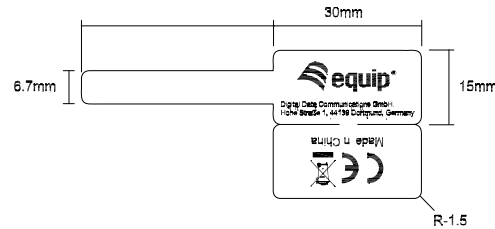

7	MOLDED	45P BLACK PVC	16	G				
6	MOLDED	LDPE	3	G				
5	SHELL	Black ABS Shell	2	PCS	PROJ:	TOLERANCE: XX=XXX=	PRODUCT NAME: USB Active extension cable	
4	PCB	PCB, FE1.1S	2	PCS	SCALE: NONE	REV: A	PART NO: 133311V3	
3	CONNECTOR	USB A Female : PIN G/F, Shell Nickel plated	1	PCS	UNIT: MM	SHEET: 1/1	CUST:	
2	CONNECTOR	USB A Male : PIN G/F, Shell Nickel plated	1	PCS	CUST APPROVED:			
1	CABLE	UL2725 28#(7/0.127TC)*1PR+24#(7/0.2TC)*2C+AL+D(1/0.254BC)+B (64/0.12LMS) Black PVC OD=4.8mm	15000	MM	APPROVED:			
					CHECKED:			
NO	NAME	SPECIFICATIONS	Q'TY	UNIT	DRAWING: Ceasar 09/27/2020			

